


Important!

In order to get the best performance from your cooling pads, they must be installed properly. If you have purchased a pad with two equal angles, these instructions can be disregarded.

Depending upon the application, pads are manufactured with the following angle combinations: 15°/45°; 30°/45°; 30°/60°; 45°/60°.

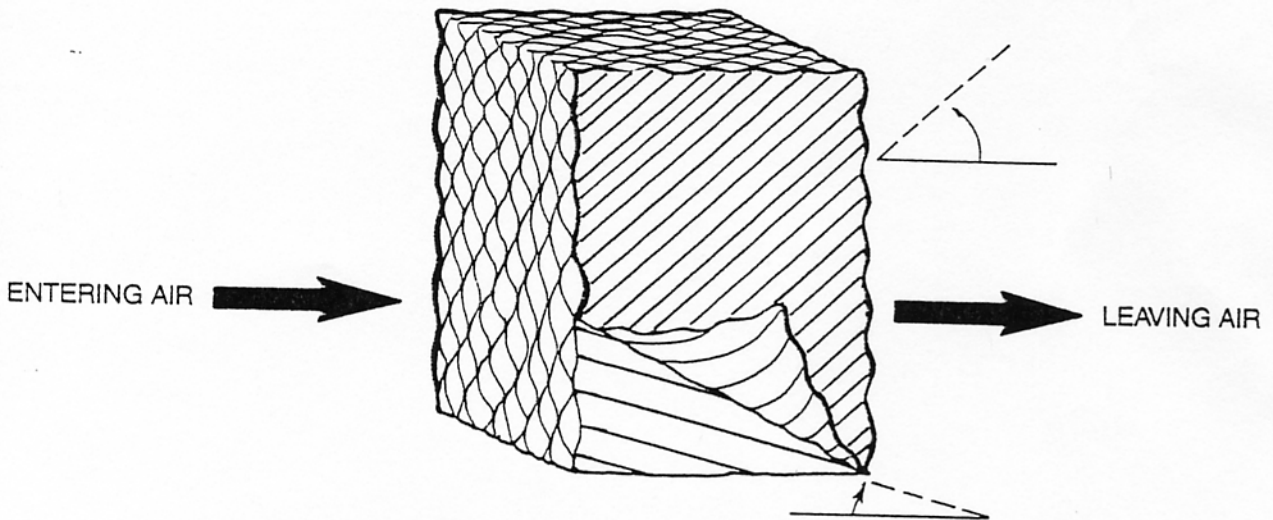

Pads must always be installed with the steeper flute angle sloping down toward the air entering side. The reasoning is simple. The steeper angle puts more water on the hot, dry, dirty side of the pad where it is needed most. It also counteracts the tendency of the air to push the water toward the back of the pad.